

# PTH-500

Door/Wall mount Panel Air Conditioner

## COOLING CAPACITY

## 500W



Features	UoM	PTH-500
Cooling Capacity EN 14511 A35 A35	W	500
Cooling Capacity EN 14511 A35 A50	W	300
Power supply	V-Hz	230 1~ 50-60
Width	mm	525
Height	mm	340
Depth	mm	150
Rated Current max.	A	2.6
Starting Current max	A	5.1
Power Draw EN 14511 A35 A35	W	375
Power Draw EN 14511 A35 A50	W	410
R134a Refrigerant	g	170
Max. refrigeration circuit Pressure	bar	28
Internal Circuit Air Flow	M3/h	280
External Circuit Air Flow	M3/h	315
Internal temperature setting Range	C°	20-45
External Maximum Temperature	C°	50
EN60529 Ingress Protection-Internal	-	IP55
EN60529 Ingress Protection-External	-	IP34
Temperature Controller	-	Digital-Factory Set 30-35 C°
Noise Level	Db(A)	61
Weight	Kg	17
Standard Color	-	RAL 7035
Evaporator Coil Protection	-	D-Coat (Details available)
Mounting on Enclosure	-	External


### Accessories

S.S Body (S.S 201, S.S 304 )

Coating in Not Standard Color

Metal Filters

### Performance

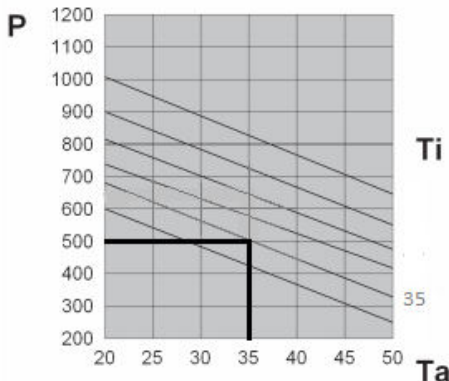

- P = Cooling capacity (W)
- Ta = Ambient Temperature (°C)
- Ti = Internal cabinet temperature (°C)

